


CON 15 Premium U

CONVECTORS

PRODUCT-NO.: 200269

The wall mounted convector – a unique combination of functionality and aesthetics. This appliance enhances its environment not only by providing pleasant heat, but also through its high quality design.

Using the integral controller, the comfort temperature can be precisely controlled by means of a weekly timer or boosted for several minutes with the push of a button. When the room is ventilated, the heater switches off automatically.

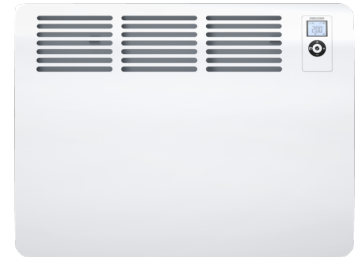

The main features

Permanent connection with FIL control core

Wall mounted convector – ideal as an auxiliary heater or interim heater in spring/autumn

Even, quiet, air heating

Operating controls with illuminated LCD screen

Weekly timer, 120-minute timer, frost protection and open window detection

Control unit with self-learning capability: automatic calculation of the preheat time in timer mode

ON/OFF switch and overheating protection

Two-stage fan heater for wall mounting



Type	CON 5 Premium U	CON 10 Premium U	CON 15 Premium U
Part no.	201278	200268	200269

Heating output

Rated heating output P _{nom}	0.50 kW	1.00 kW	1.50 kW
Minimum heating output (standard value) P _{min}	0.00 kW	0.00 kW	0.00 kW
Maximum continuous heating output P _{max,c}	0.50 kW	1.00 kW	1.50 kW

Auxiliary power consumption

H rated heating output e _{lmax}	0.00 kW	0.00 kW	0.00 kW
H minimum heating output e _{lmin}	0.00 kW	0.00 kW	0.00 kW
Dby mode e _{lSB}	0.00 kW	0.00 kW	0.00 kW

Type of heating output/room temperature control

Single stage heating output, no room temperature control	-	-	-
Two or more manual stages, no room temperature control	-	-	-
With mechanic thermostat room temperature control	-	-	-
With electronic room temperature control	-	-	-
Electronic room temperature control plus day timer	-	-	-
Electronic room temperature control plus week timer	x	x	x

Other control options

Room temperature control, with presence detection	-	-	-
Room temperature control, with open window detection	x	x	x
With distance control option	-	-	-
With adaptive start control	x	x	x
With working time limitation	-	-	-
With black bulb sensor	-	-	-



Type	CON 20 Premium U	CON 30 Premium U
Part no.	200270	200276

Heating output

Rated heating output P _{nom}	2.00 kW	3.00 kW
Minimum heating output (standard value) P _{min}	0.00 kW	0.00 kW
Maximum continuous heating output P _{max,c}	2.00 kW	3.00 kW

Auxiliary power consumption

H rated heating output e _{Hmax}	0.00 kW	0.00 kW
H minimum heating output e _{Hmin}	0.00 kW	0.00 kW
Dby mode e _{SB}	0.00 kW	0.00 kW

Type of heating output/room temperature control

Single stage heating output, no room temperature control	-	-
Two or more manual stages, no room temperature control	-	-
With mechanic thermostat room temperature control	-	-
With electronic room temperature control	-	-
Electronic room temperature control plus day timer	-	-
Electronic room temperature control plus week timer	x	x

Other control options

Room temperature control, with presence detection	-	-
Room temperature control, with open window detection	x	x
With distance control option	-	-
With adaptive start control	x	x
With working time limitation	-	-
With black bulb sensor	-	-

Depth including wall mounting bracket

Contact information

Do you have additional questions? Then please do not hesitate to contact us, we would be only too happy to help:

Call 0151 346 2300

Or send an e-mail to

sales@stiebel-eltron.co.uk

Only a qualified contractor should carry out the installation, commissioning, maintenance and repair of this appliance. Where applicable and prior to installation the electricity and/or water utility companies should be notified of your intention to install the product.