

# CON 20 Premium U

CONVECTORS

PRODUCT-NO.: 200270

## Stylish warmth.

The wall mounted convector – a unique combination of functionality and aesthetics. This appliance enhances its environment not only by providing pleasant heat, but also through its high quality design.

**Comfort functions to warm you up in next to no time.** Using the integral controller, the comfort temperature can be precisely controlled by means of a weekly timer or boosted for several minutes with the push of a button. When the room is ventilated, the heater switches off automatically.

## The main features

---

Permanent connection with FIL control core

---

Wall mounted convector – ideal as an auxiliary heater or interim heater in spring/autumn

---

Even, quiet, air heating

---

Operating controls with illuminated LCD screen

---

Weekly timer, 120-minute timer, frost protection and open window detection

---

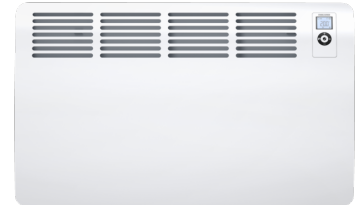
Control unit with self-learning capability: automatic calculation of the preheat time in timer mode

---

ON/OFF switch and overheating protection

---

Two-stage fan heater for wall mounting

**CON 5 Premium U**


Product-No.: 201278

**CON 10 Premium U**

Product-No.: 200268

**CON 15 Premium U**

Product-No.: 200269

**CON 30 Premium U**

Product-No.: 200276



Type	CON 5 Premium U	CON 10 Premium U	CON 15 Premium U
Part no.	201278	200268	200269

## Technical data

Power supply	1/N/PE ~ 230 V	1/N/PE ~ 230 V	1/N/PE ~ 230 V
Rated voltage	230 V	230 V	230 V
Rated current	2,2 A	4,3 A	6,5 A
Connected load	0,5 kW	1,0 kW	1,5 kW
IP rating	IP24	IP24	IP24
Protection class	I	I	I
Colour	alpine white	alpine white	alpine white
Setting range	5-30 °C	5-30 °C	5-30 °C
Height	470 mm	470 mm	470 mm
Width	345 mm	470 mm	625 mm
Depth	126 mm	126 mm	126 mm
Weight	4.30 kg	5.90 kg	7.50 kg



Type	CON 20 Premium U	CON 30 Premium U
Part no.	200270	200276

### Technical data

Power supply	1/N/PE ~ 230 V	1/N/PE ~ 230 V
Rated voltage	230 V	230 V
Rated current	8,7 A	13,0 A
Connected load	2 kW	3 kW
IP rating	IP24	IP24
Protection class	I	I
Colour	alpine white	alpine white
Setting range	5-30 °C	5-30 °C
Height	470 mm	470 mm
Width	780 mm	1090 mm
Depth	126 mm	126 mm
Weight	9.30 kg	12.60 kg

Depth including wall mounting bracket

## **Contact information**

Do you have additional questions? Then please do not hesitate to contact us, we would be only too happy to help:

Call 0151 346 2300

Or send an e-mail to

[sales@stiebel-eltron.co.uk](mailto:sales@stiebel-eltron.co.uk)

Only a qualified contractor should carry out the installation, commissioning, maintenance and repair of this appliance. Where applicable and prior to installation the electricity and/or water utility companies should be notified of your intention to install the product.