


# WPL 25 AS

PRODUCT-NO.: 236642

## Efficient heating with a top performer

When outside temperatures are far below zero, you'd rather be indoors in a well heated room. Providing you with a warm and cosy interior is no problem for this outdoor air source heat pump. It continues to operate at maximum efficiency even when the mercury drops below freezing. Furthermore, thanks to high flow temperatures, you can even use the appliance to heat traditional radiators.

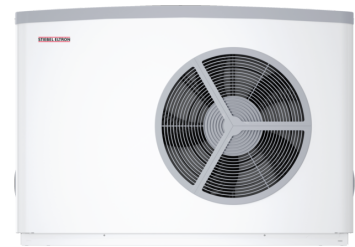

## The main features

Air source heat pump installed outdoors for heating

---

Ideal for new build and modernisation

---

Inverter technology for high efficiency and low energy bills

---

Low noise emissions due to intelligent appliance design

---

Operating noise can be further reduced in night mode ("silent mode")

---

Optional integration into the home network and control via smartphone  
(additional components required)

---

Flow temperatures of up to 65 °C for first rate DHW convenience

---

High Energy efficiency class A+++ even when using radiators



|          |           |
|----------|-----------|
| Type     | WPL 25 AS |
| Part no. | 236642    |

## Technical data

|  |           |
|--|-----------|
| Energy efficiency class, heat pump W35                                 | A++       |
| Energy efficiency class, heat pump W55                                 | A++       |
| Energy efficiency class, composite system (heat pump + controller) W35 | A+++      |
| Energy efficiency class, composite system (heat pump + controller) W55 | A++       |
| Heating output at A7/W35 (EN 14511)                                    | 8.00 kW   |
| Heating output at A2/W35 (EN 14511)                                    | 8.33 kW   |
| Heating output at A-7/W35 (EN 14511)                                   | 12.86 kW  |
| COP at A7/W35 (EN 14511)   | 4.82      |
| COP at A2/W35 (EN 14511)   | 4.14      |
| COP at A-7/W35 (EN 14511)  | 2.98      |
| SCOP (EN 14825)  | 4.39      |
| Sound power level (EN 12102)   | 55 dB(A)  |
| Min./max. application limits for heat source                           | -20-40 °C |
| Max. application limit on the heating side                             | 65 °C     |
| Height   | 1045 mm   |
| Width  | 1490 mm   |
| Depth  | 593 mm    |
| Weight   | 175 kg    |
| Rated voltage, compressor  | 230 V     |
| Rated voltage, emergency/auxiliary heater                              | 230 V     |
| Refrigerant  | R410A     |



## **Contact information**

Do you have additional questions? Then please do not hesitate to contact us, we would be only too happy to help:

Call 0151 346 2300

Or send an e-mail to

[sales@stiebel-eltron.co.uk](mailto:sales@stiebel-eltron.co.uk)

Only a qualified contractor should carry out the installation, commissioning, maintenance and repair of this appliance. Where applicable and prior to installation the electricity and/or water utility companies should be notified of your intention to install the product.